Optics Matter

PFXL190LED

LUMENS: 19,106
LUMENS PER WATT: 104
CCT: 4500K

WATTS: 190
CRI: 72
DIMMING: 10-100%

Design is Protected by US Patent D740,997

MANUFACTURED
& TESTED IN USA

Ordering Information

CATALOG #	DESCRIPTION	VOLTS
PFXL190LED	190W LED Power Flood Pro	120-277
PFXL190LEDS	190W LED Power Flood Pro w/Slipfitter	120-277
	Standard Optic - Medium Wide	

Options

ADD SUFFIX #	DESCRIPTION
4	480V Philips Driver
PC	120V Photocontrol
PM	208-277V Photocontrol
W	Wide Optics
EW	Extra-wide Optics

Note: Atlas uses only premium LED compatible photocontrols

3.0 4.7 8.0 13.0 17.6 19.9
25' 20' 15' 10' 5'

Average Footcandles

10.2

45'

45' Setback
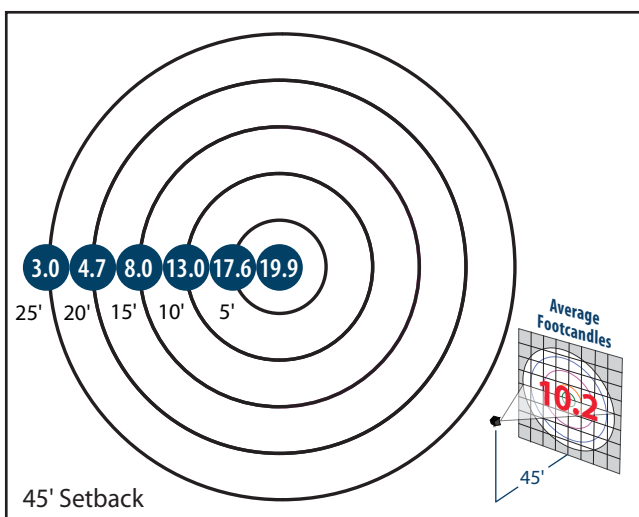
Performance

- **Optical Grade Individual Acrylic Lenses**
- **More Footcandles Delivered to the Target**
- **Less Glare and Wasted Light**

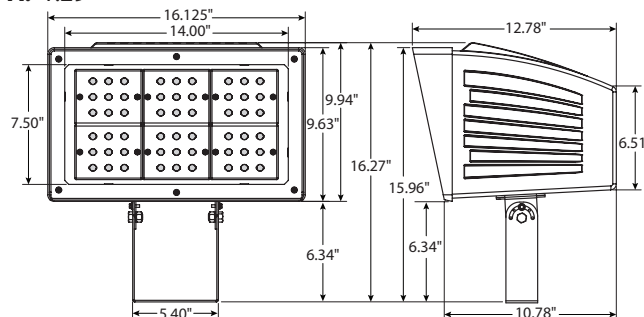## Dimensions and Specifications

Overall Height (Trunion): 16.27"   **Depth:** 12.78"
Overall Width: 16.125"   **Weight:** (with Trunion) 30 lbs.
EPA: 1.29   (with Slipfitter) 31 lbs.

16.125"
14.00"
7.50"
9.94"
9.63"
16.27"
6.34"
5.40"

12.78"
15.96"
6.51"
6.34"
10.78"

200,000+ HOURS

THERMAL STACKING

c UL us LISTED

5 YEAR WARRANTY

*The majority of Atlas Lighting Products are assembled in USA facilities by an American Workforce utilizing both Domestic and Foreign components