LCS

LED Open Striplight

STRIPLIGHTS

createchange

FEATURES

- Long-life 60,000 hour LEDs at L80 for reduced maintenance
- Four LED color choices and 80+ CRI
- Four lumen packages
- Superior color consistency within a 3-step MacAdam ellipse and greater than 80 CRI
- Available in 2', 4', or 8' lengths
- Heavy die-formed steel channel
- LED boards and driver accessible for future maintenance or upgrades
- Surface Mount or Suspended
- QR code traceability
- Maximum temperature 25°C on all lumen packages up to HL
- DLC® (DesignLights Consortium) Qualified, with some Premium Qualified configurations - see www.designlights.org
- Five year warranty (Terms and Conditions apply)

ORDERING INFORMATION

LCS			-				-	
MODEL	SIZE	COLOR TEMP	LUMEN OUTPUT	DRIVER	VOLTAGE	OPTIONS		

MODEL	
LCS	LED Striplight

SIZE	
2	2'
4	4'
8	8'

COLOR TEMP	
30	3000K
35	3500K
40	4000K
50	5000K

LUMEN OUTPUT	
LW	Low Watt
ML	Medium Lumen
HL	High Lumen
VL	Very High Lumen

See Product Availability Table below.

DRIVER	
E	Fixed Output
ESD	Step Dimming[3]
ED	0-10V Dimming
LUTH	Hi-lume 1% EcoSystem LED driver with Soft-on, Fade-to-Black dimming technology
LUT5	5-Series EcoSystem LED driver

VOLTAGE	
U	120V-277V
347	347 (E,ED only)
480	480V[4]

OPTIONS	
ELL14	Emergency Battery Pack, 1400 Lumens[1,2]
GLR	Fast Blow Fuse
PAF	Paint After Fabrication

[1] Not available in 2' size.
[2] For compatibility with Dual-Lite LiteGear® inverters in lieu of installed Battery Pack, contact Hubbell Lighting Representative.
[3] Only available in 4' ML, HL & VL packages.
[4] Consult factory for LW lumen package.

ACCESSORIES (ORDER SEPARATELY)	
CSWG4	4' Wire Guard
S18	18" Stem, Canopy
SS18	18" Swivel Stem—45° Swivel
CSHC	Chain Hanger Assembly

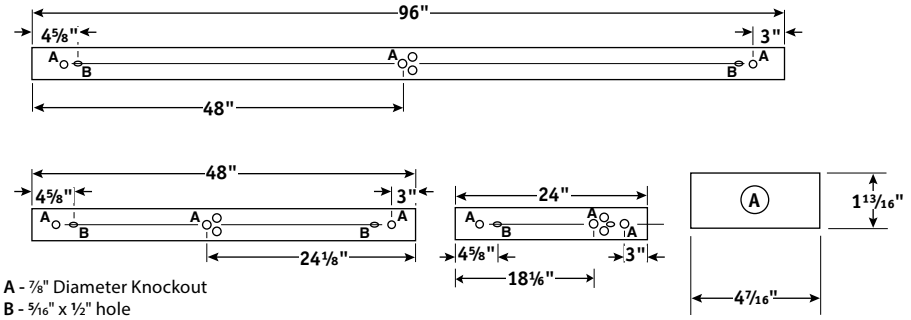

A - ⅞" Diameter Knockout
B - 5/16" x ½" hole
Note 1: All Non-Shielded (strip) fixtures- Deduct 1/16" from overall dimension for continuous row mounting. Dimensions shown include end panel.

PRODUCT AVAILABILITY

SIZE	LUMEN PACKAGE	LUMENS (4000K)	NOMINAL WATTS	EFFICACY
2'	ML	3,041	23	131
4'	LW	2,795	19	149
	ML	5,661	42	136
	HL	6,900	52	132
	VL	11,334	88	129
8'	LW	5,590	38	149
	ML	11,322	83	136
	HL	13,800	105	132
	VL	22,668	176	129

Lumens vary according to color temperatures and other factors. See specific photometric test(s).

Columbia LIGHTING